


DIMENSIONS

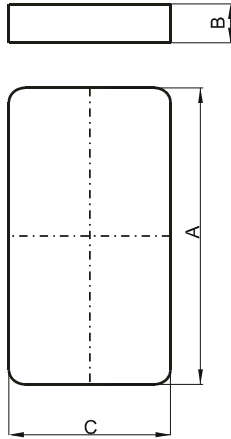

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	21.8	-0.4	+ 0.4
B	2.49	-0.13	+ 0.13
C	15.8	-0.3	+ 0.3
Eff. Parameters (with 0R42214EC)			
Ae mm²	Amin mm²	le mm	Ve mm³
79	78.5	26.1	2060

INDUCTANCE

MARKING

AL value (nH/T ²)	Test conditions (with 0R42214EC)
5280 ±25%	10 kHz, < 0.5 mT, 25 °C

0R42214IC

CORE LOSSES

P _i max	Test conditions
< 0.18 W/set (< 87 mW/cm ³)	100 kHz, 100 mT, 100 °C
< 1.26 W/set (< 612 mW/cm ³)	100 kHz, 200 mT, 100 °C

NOTE

Spec. modifications	Previous	Revised
2014-04-23		Issued