


DIMENSIONS

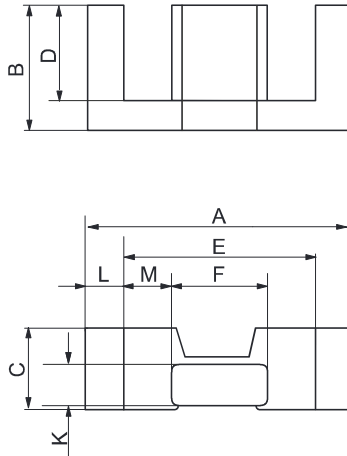

| (mm) | Nominal: | Tol. min.: | Tol. max.: |
|--------------------|----------------------|------------|--------------------|
| A | 30.0 | -0.8 | + 0.8 |
| B | 15.0 | -0.15 | + 0.15 |
| C | 9.1 | -0.2 | + 0.2 |
| D | 11.2 | -0.3 | + 0.3 |
| E | 22.4 | -0.75 | + 0.75 |
| F | 14.6 | -0.25 | + 0.25 |
| K | 4.9 | -0.15 | + 0.15 |
| L | 3.8 Ref. | | |
| M | 3.9 Ref. | | |
| Eff. Parameters | | | |
| Ae mm ² | Amin mm ² | le mm | Ve mm ³ |
| 69.0 | 66.0 | 68.0 | 4700 |

INDUCTANCE

MARKING

| AL value (nH/T ²) | Test conditions |
|-------------------------------|-------------------------|
| Nom: 2200 Min.: 1650 | 10 kHz, < 0.5 mT, 25 °C |

| |
|---------|
| R EC |
|---------|

CORE LOSSES

| P _i max | Test conditions |
|------------------------------------|-------------------------|
| 91 mW/cm ³ (0.43 W/set) | 100 kHz, 100 mT, 100 °C |
| 553 mW/cm ³ (2.6 W/set) | 100 kHz, 200 mT, 100 °C |