


DIMENSIONS

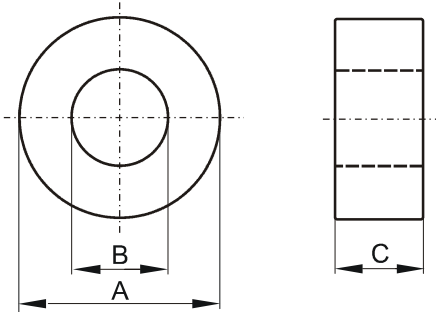

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	49.1	48.36	49.84
I.D. (B)	33.8	33.07	34.53
Ht. (C)	15.9	15.54	16.26
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
120	127	15300	

INDUCTANCE

AL value (nH/T ²)	Test conditions
2710 ± 25%	10 kHz, 0.5 mT (For N=5, use 2.6 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 1.65 W (< 110 mW/cm ³)	< 1.50 W (< 100 mW/cm ³)	100 kHz, 100 mT, 100 °C
< 10.7 W (< 715 mW/cm ³)	< 9.76 W (< 650 mW/cm ³)	100 kHz, 200 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Losses: General R material	Losses: Detail as indicated