


DIMENSIONS

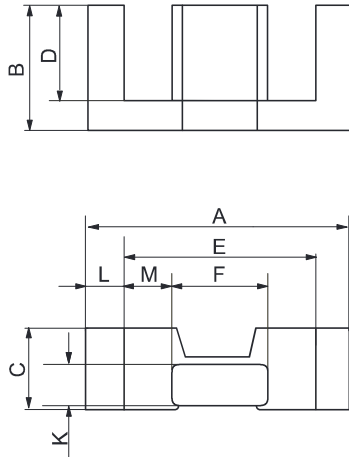

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	20.0	-0.55	+ 0.55
B	10.0	-0.15	+ 0.15
C	6.65	-0.15	+ 0.15
D	7.7	-0.25	+ 0.25
E	15.4	-0.5	+ 0.5
F	8.9	-0.2	+ 0.2
K	3.6	-0.15	+ 0.15
L	2.3 Ref.		
M	3.25 Ref.		
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
31.0	29.0	47.0	1460

INDUCTANCE

AL value (nH/T ²)	Test conditions
1540 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

T EC

CORE LOSSES

P _i max	Test conditions
< 0.86 W/set (< 590 mW/cm ³)	100 kHz, 200 mT, 25 °C
< 0.82 W/set (< 560 mW/cm ³)	100 kHz, 200 mT, 100 °C

NOTE

Spec. modifications	Previous	Revised
2013-03-29		Issued