


DIMENSIONS

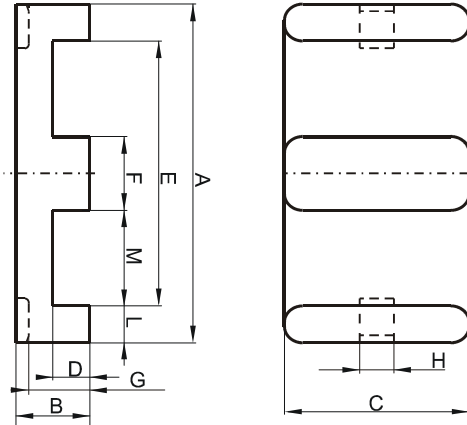

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	31.75	-0.64	+ 0.64
B	6.35	-0.13	+ 0.13
C	20.32	-0.41	+ 0.41
D	3.18	-0.2	+ 0.2
E	24.9 Min.		
F	6.35	-0.13	+ 0.13
G	5.3		
H	5.0	0.0	+ 0.2
L	3.18		
M	9.27		
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
130.0	130.0	41.4	5380

INDUCTANCE

MARKING

AL value (nH/T²)	Test conditions	CF43208EC PXXXXX
7834 ± 25%	10 kHz, < 0.5 mT, 25 °C	

CORE LOSSES

P_i max	Test conditions
< 1.1 W/set (< 204 mW/cm ³)	25 kHz, 200 mT, 100 °C