




CMC040025015L30

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1) 800-245-3984
 HK Sales: (852) 3102-9337
 magnetics@spang.com
 www.mag-inc.com

Dimensions				
	Bare (mm)	tol +/-	Case (mm)	tol +/-
OD	40.0	typ	44.0	0.50
ID	25.0	typ	21.6	0.50
HT	15.0	typ	18.9	0.50

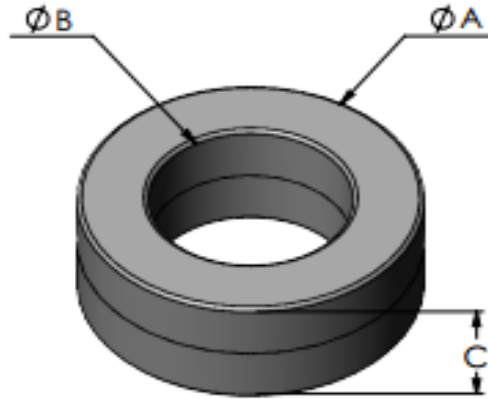

A_L ($\mu\text{H}/\text{T}^2$)	Conditions	
22 -- 44	10 kHz	2 mT
13.2 min	100 kHz	2 mT

A_e (cm^2)	L_e (cm)	Weight (g)	Color
0.92	10.2	68.0 (Ref)	Black

FR530 Class F (155°C)

Material	Nanocrystalline
Saturation Flux Density	1.25 Tesla
Permeability	30,000
Curie Temperature	560 °C
Continuous working Temperature	-40 °C to +155 °C