




CMF025020010H

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1) 800-245-3984
 HK Sales: (852) 3102-9337
 magnetics@spang.com
 www.mag-inc.com

Dimensions				
	Bare (mm)	tol +/-	Case (mm)	tol +/-
OD	25.0	typ	27.5	0.50
ID	20.0	typ	18.0	0.50
HT	10.0	TYP	13.0	0.50

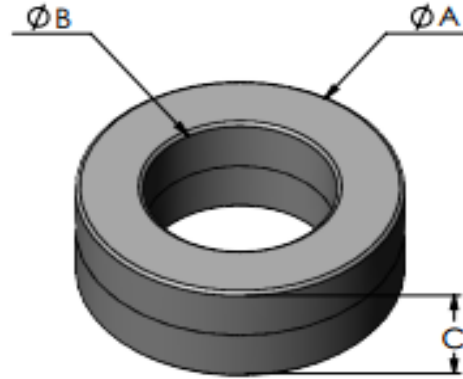

L (μH)	Conditions		Turns
28.4 -20% +45%	10 kHz	2 mT	1
7.8 Min	100 kHz	2 mT	1

A _e (cm ²)	L _e (cm)	Weight (g)	Color
0.21	7.07	10.43 (Ref)	Black

FR530 Class F 155 °C

Material	Nanocrystalline
Saturation Flux Density	1.25 Tesla
Initial permeability	80,000
Curie Temperature	560 °C
Continuous working Temperature	-40 °C to +155 °C