




CMF032020015H

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1) 800-245-3984
 HK Sales: (852) 3102-9337
 magnetics@spang.com
 www.mag-inc.com

Dimensions				
	Bare (mm)	tol +/-	Case (mm)	tol +/-
OD	32.0	typ	34.5	0.50
ID	20.0	typ	17.6	0.50
HT	15.0	typ	18.2	0.50

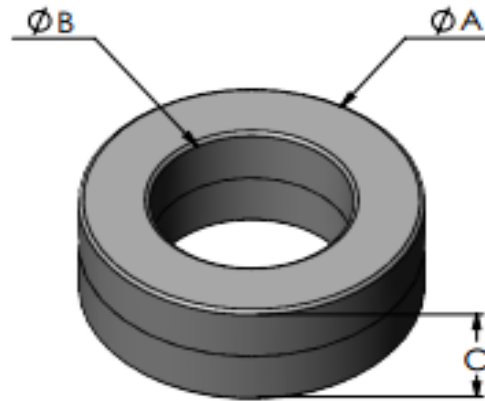

A_L ($\mu\text{H}/\text{T}^2$)	Conditions	
90 +/- 30%	10 kHz	2 mT
25 min	100 kHz	2 mT

A_e (cm^2)	L_e (cm)	Weight (g)	Color
0.73	8.2	43.38 (Ref)	Black

FR530 Class F (155°C)

Material	Nanocrystalline
Saturation Flux Density	1.2 Tesla
Permeability	80,000
Curie Temperature	570 °C
Continuous working Temperature	-40 °C to +155 °C