




CMF064040010H85

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1) 800-245-3984
 HK Sales: (852) 3102-9337
 magnetics@spang.com
 www.mag-inc.com

Dimensions				
	Bare (mm)	tol +/-	Case (mm)	tol +/-
OD (ØA)	64.0	TYP	68.0	0.60
ID (ØB)	40.0	TYP	36.8	0.60
HT (C)	10.0	TYP	14.0	0.60

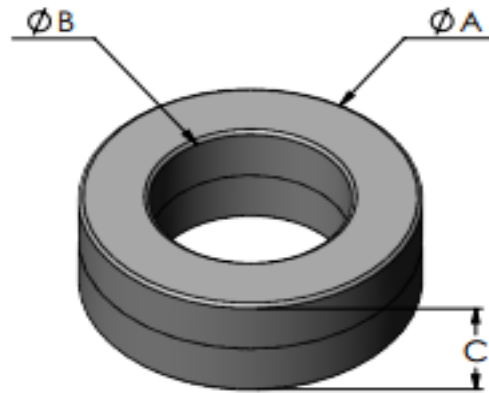

L (µH)	Conditions		Turns
60.0 +/- 30%	10 kHz	2 mT	1
17.0 MIN	100 kHz	2 mT	1

A _e (cm ²)	L _e (cm)	Weight (g)	Color
0.98	16.3	115g (Ref)	Black

FR530 155 °C

Material	Nanocrystalline
Saturation Flux Density	1.25 Tesla
Initial permeability	80,000
Curie Temperature	560 °C
Continuous working Temperature	-40 °C to +155 °C