




CMF065050025H

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1) 800-245-3984
 HK Sales: (852) 3102-9337
 magnetics@spang.com
 www.mag-inc.com

Dimensions				
	Bare (mm)	tol +/-	Case (mm)	tol +/-
OD (ØA)	65.0	typ	68.3	0.50
ID (ØB)	50.0	typ	46.8	0.50
HT (C)	25.0	0.20	28.9	0.50

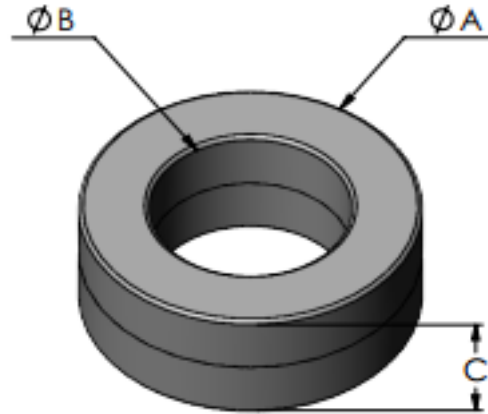

L (µH)	Conditions		Turns
77.3 +/-30%	10 kHz	2 mT	1
18.9 min	100 kHz	2 mT	1

A _e (cm ²)	L _e (cm)	Weight (g)	Color
1.57	18.0	197 (Ref)	Black

FR530 155 °C

Material	Nanocrystalline
Saturation Flux Density	1.25 Tesla
Initial permeability	80,000
Curie Temperature	560 °C
Continuous working Temperature	-40 °C to +155 °C