


**DIMENSIONS**

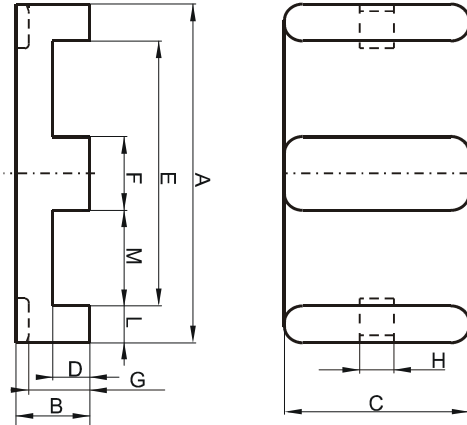

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	31.75	-0.64	+ 0.64
<b>B</b>	6.35	-0.13	+ 0.13
<b>C</b>	20.32	-0.41	+ 0.41
<b>D</b>	3.18	-0.2	+ 0.2
<b>E</b>	24.9 Min.		
<b>F</b>	6.35	-0.13	+ 0.13
<b>G</b>	5.3		
<b>H</b>	5.0	0.0	+ 0.2
<b>L</b>	3.18		
<b>M</b>	9.27		
<b>Eff. Parameters</b>			
<b>Ae mm<sup>2</sup></b>	<b>Amin mm<sup>2</sup></b>	<b>le mm</b>	<b>Ve mm<sup>3</sup></b>
130.0	130.0	41.4	5380

**INDUCTANCE**

<b>AL value (nH/T<sup>2</sup>)</b>	<b>Test conditions</b>
Nom: 6918 Min.: 5189	10 kHz, < 0.5 mT, 25 °C

**MARKING**

CP43208EC PXXXXX
---------------------

**CORE LOSSES**

<b>P<sub>i</sub> max</b>	<b>Test conditions</b>
< 0.65 W/set (< 121 mW/cm <sup>3</sup> )	100 kHz, 100 mT, 100 °C