


Specification for:

FF43208IC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email: magnetics@spang.com

DIMENSIONS

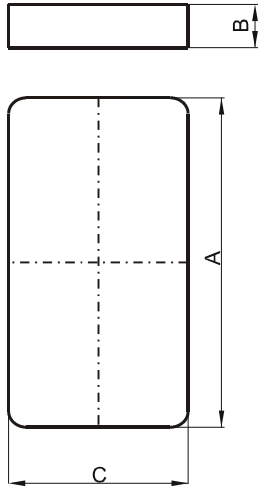

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	31.75	-0.64	+ 0.64
B	3.18	-0.13	+ 0.13
C	20.32	-0.41	+ 0.41
Eff. Parameters (with F_43208EC)			
Ae mm²	Amin mm²	le mm	Ve mm³
130.0	130.0	35.1	4560

INDUCTANCE

AL value (nH)	Test conditions (with FF43208EC)
8711 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

FF43208IC PXXXXX

CORE LOSSES

P _i max	Test conditions
204 mW/cm ³ (0.93 W/set)	25 kHz, 200 mT, 100 °C

NOTE

Spec. modifications	Previous	Revised
2005-06-22	AL=10313±25% A=32.26 Max. A=31.24 Min. Losses: General F material	AL=9760±25% A=32.39 Max. A=31.11 Min. Losses: Detail as indicated