


DIMENSIONS

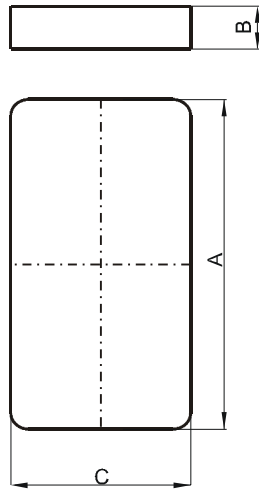

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	21.8	-0.4	+ 0.4
B	2.95	-0.1	+ 0.1
C	15.8	-0.3	+ 0.3
Eff. Parameters (with F_42216EC)			
Ae mm²	Amin mm²	le mm	Ve mm³
80.6	80.6	25.8	2080

INDUCTANCE

AL value (nH/T ²)	Test conditions (with FL42216EC)
2900 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

CORE LOSSES

P _i max	Test conditions
226 mW/cm ³ (0.47 W/set)	1000 kHz, 30 mT, 100 °C
Ref. 400 mW/cm ³ (0.83 W/set)	3000 kHz, 10 mT, 100 °C