


DIMENSIONS

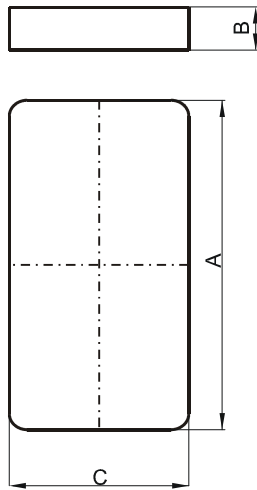

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	38.1	-0.76	+ 0.76
B	3.81	-0.13	+ 0.13
C	25.4	-0.51	+ 0.51
Eff. Parameters (with F_43808EC)			
Ae mm²	Amin mm²	le mm	Ve mm³
194.0	194.0	43.7	8460

INDUCTANCE

MARKING

AL value (nH/T²)	Test conditions (with FL43808EC)	No marking
4600 ± 25%	10 kHz, < 0.5 mT, 25 °C	

CORE LOSSES

P_i max	Test conditions
236 mW/cm ³ (2 W/set)	1000 kHz, 30 mT, 100 °C