
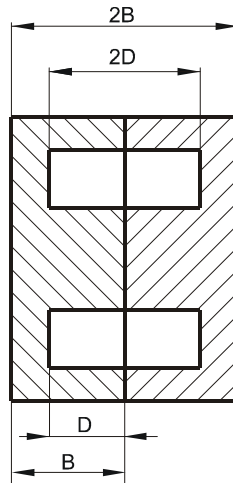


Specification for:

**PJ40707UG**

110 Delta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email: magnetics@spang.com

**DIMENSIONS**

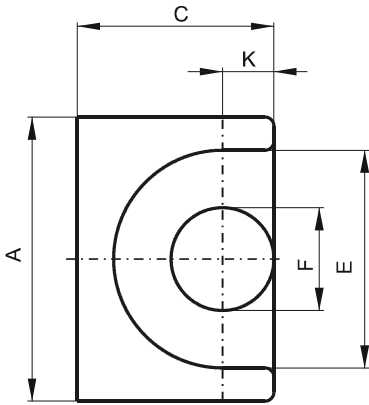

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	9.2	-0.2	+ 0.2
<b>B</b>	3.7	-0.05	+ 0.05
<b>2B</b>	7.4	-0.1	+ 0.1
<b>C</b>	6.35	-0.15	+ 0.15
<b>D</b>	2.5 Min.		
<b>2D</b>	5.0 Min.		
<b>E</b>	7.2 Min.		
<b>F</b>	3.4 Max.		
<b>K</b>	1.7	-0.1	+ 0.1
Eff. Parameters			
Ae mm <sup>2</sup>	Amin mm <sup>2</sup>	le mm	Ve mm <sup>3</sup>
10.7	8.55	15.5	165

**INDUCTANCE**

AL value (nH)	Test conditions
Nom: 2573 Min.: 1930	10 kHz, < 0.5 mT, 25 °C

**MARKING**

No marking

**LOSS FACTOR**

$\tan \delta/\mu$ ( $\times 10^{-6}$ )	Test conditions
< 15	100 kHz, < 0.25 mT, 25 °C

**NOTE**

Spec. modifications	Previous	Revised
2005-06-16	Loss factor: General J material	Loss factor: Detail as indicated