




PTB122064035HCC

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1) 800-245-3984
 HK Sales: (852) 3102-9337
 magnetics@spang.com
 www.mag-inc.com

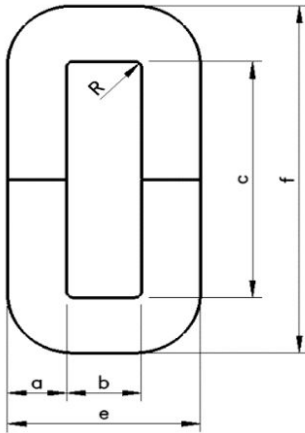

	Dim (mm)	tol +/-
a	19.0	1.0
b	24.0	min
c	83.0	min
d	35.0	0.5
e	63.5	1.5
f	122.0	2.0
R	2.0	ref

A_e (cm ²)	L_e (cm)	Weight (g)	A_L (μ H/T ²)	Conditions	
6.12	26.7	1166 Ref	TBD	10 kHz	2 mT

Material	Nanocrystalline
Saturation Flux Density	1.25 T
Initial Permeability	80,000
Curie Temperature	560°C
Continuous Working Temperature	-40°C + 150°C
Density	7.25 ρ
Resistivity	130 $\mu\Omega$ /cm
Stacking Factor	≥ 0.75