




Specification for:  
**VJ42507TC**

110 Delta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email:magnetics@spang.com

**DIMENSIONS**

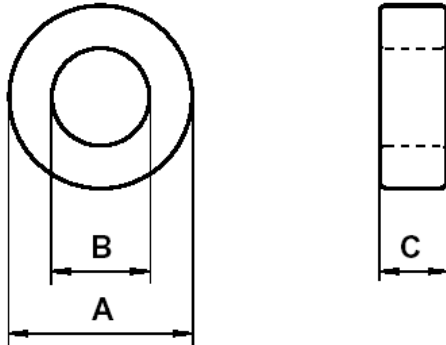

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	25.34	25.24	26.64
I.D. (B)	15.45	14.15	15.35
Ht. (C)	7.66	7.66	8.66

Eff. Parameters		
A <sub>e</sub> mm <sup>2</sup>	l <sub>e</sub> mm	V <sub>e</sub> mm <sup>3</sup>
37.1	61	2284

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
3913 ± 20%	Up to 200 kHz, 0.5 mT (For N = 1, use 2.79 mA), 25°C

**ELECTRICAL LOSSES**

tan δ / μ <sub>i</sub>	Test conditions
≤ 12·10 <sup>-6</sup>	100 kHz, 0.5 mT, 25°C

**COATING**

Nylon 11 rated for 155°C continuous operation.
Voltage breakdown rating 2000 V Min Wire-to-Wire.

**NOTE**

Spec. Modifications	Previous	Revised
2005.06.14	Bare Nom OD = 25.4 Bare Nom ID = 15.5 Bare Nom Ht = 7.92 OD Max = 26.29 ID Min = 14.6 HT Max = 8.56 LF: General J Material Breakdown voltage > 1,000 V P/N prefix for coating = Z (nylon or epoxy)	Bare Nom OD = 25.34 Bare Nom ID = 15.45 Bare Nom Ht = 7.66 OD Max = 26.64 ID Min = 14.15 HT Max = 8.66 LF: Detail as indicated Breakdown voltage > 2,000 V P/N prefix for coating = V (nylon specified)