


DIMENSIONS

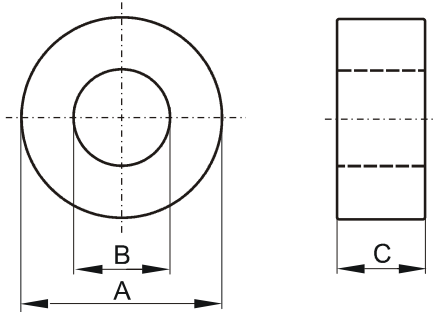

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	20.6	19.3	21.9
I.D. (B)	12.7	11.4	14
Ht. (C)	6.35	5.45	7.25
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
24.6	50.3	1238	

INDUCTANCE

AL value (nH/T ²)	Test conditions
1500 ± 25%	10 kHz, 0.5 mT (For N=5, use 0.94 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 0.15 W (< 123 mW/cm ³)	< 0.14 W (< 112 mW/cm ³)	100 kHz, 100 mT, 100 °C

COATING

Nylon Grey rated for 155°C continuous operation
Voltage breakdown rating 2000VDC Min Wire-to-Wire

NOTE

Spec. modifications	Previous	Revised
2007-06-05	VBD = 1000V Losses: General P material	VBD = 2000VDC Losses: Detail as indicated