


**DIMENSIONS**

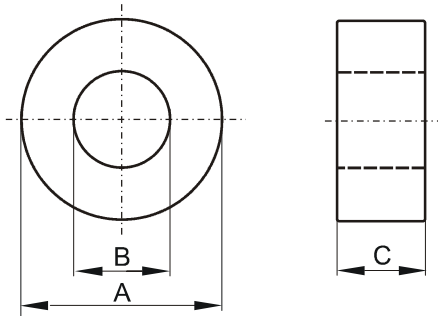

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
<b>O.D. (A)</b>	9.505	9.2	9.86
<b>I.D. (B)</b>	4.775	4.42	5.08
<b>Ht. (C)</b>	3.155	2.98	3.38
<b>Eff. Parameters</b>			
<b>Ae mm<sup>2</sup></b>	<b>le mm</b>	<b>Ve mm<sup>3</sup></b>	
7.3	20.72	151.24	

**INDUCTANCE**

<b>AL value (nH/T<sup>2</sup>)</b>	<b>Test conditions</b>
1320 ± 25%	10 kHz, 0.5 mT (For N=3, use 0.54 mA), 25°C

**REMARKS**

PI value measured on 0T41450TC sintered together with YT41003TC PI <181mW Test conditions: 100kHz, 200mT, 25°C) PI <172mW Test conditions: 100kHz, 200mT, 100°C)
--

**COATING**

Parylene rated for 130°C continuous operation Voltage breakdown rating 1000 VDCMin Wire-to-Wire
--

**NOTE**

<b>Spec. modifications</b>	<b>Previous</b>	<b>Revised</b>
2015-01-08		Issued