


DIMENSIONS

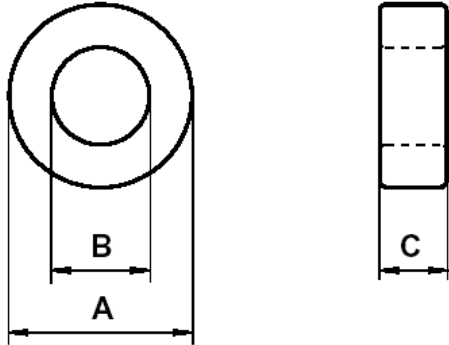

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	25.34	24.89	26.29
I.D. (B)	15.45	14.6	15.80
Ht. (C)	7.92	8.08	8.56

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
39	61.5	2361

INDUCTANCE

AL value (nH/T ²)	Test conditions
2348 ± 20%	10 kHz, 0.5 mT (For N = 5, use 0.95 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
511 (220 mW/cm ³)	465 (200 mW/cm ³)	25 kHz, 200 mT, 100°C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 2000 V _{DC} Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2007.12.14	Breakdown voltage > 1,000 V Losses: General F Material	Breakdown voltage > 2,000 V _{DC} Losses: Detail as indicated