




Specification for:
ZJ42206TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

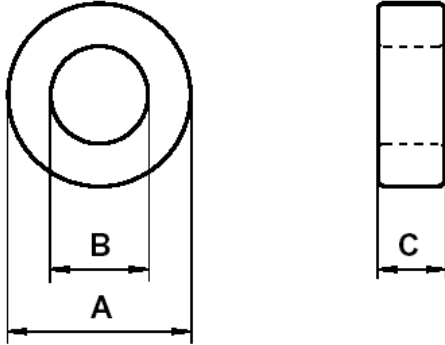

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	22.1	21.84	22.86
I.D. (B)	13.7	12.95	13.95
Ht. (C)	6.25	6.39	6.91

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
25.8	54.1	1395

INDUCTANCE

A _L value (nH/T ²)	Test conditions	
3020 ± 20%	10 kHz	0.5 mT (For N = 1, use 2.5 mA), 25°C
≥ 0.9 x A _L @ 10 kHz	200 kHz	

ELECTRICAL LOSSES

tan δ / μ _i	Test conditions
≤ 12·10 ⁻⁶	100 kHz, 0.5 mT, 25°C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1500 V _{DC} min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2006.06.21	Bare Nom Ht = 6.35 LF: General J Material Breakdown voltage > 1,000 V A _L value up to 200 kHz	Bare Nom Ht = 6.25 LF: Detail as indicated Breakdown voltage > 1,500 V _{DC} A _L at 200 kHz ≥ 0.9 x A _L at 10 kHz