


DIMENSIONS

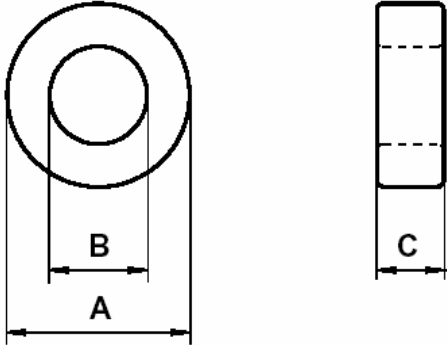

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	107	105.3	109.5
I.D. (B)	65.0	63.3	66.1
Ht. (C)	25.0	24.55	26.05

Eff. Parameters		
A_e mm ²	l_e mm	V_e mm ³
514.3	259.31	133351

INDUCTANCE

A_L value (nH/T ²)	Test conditions	
12461 ± 20%	10 kHz	0.5 mT (For N = 1, use 12.16 mA), 25°C
≥ 9346	100 kHz	

ELECTRICAL LOSSES

$\tan \delta / \mu_i$ (Ref. Value only)	Test conditions
$20 \cdot 10^{-6}$	100 kHz, 0.5 mT, 25°C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 2000 V Min Wire-to-Wire.