




Specification for:
ZM41407TC

110 Zeta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email: magnetics@spang.com

DIMENSIONS

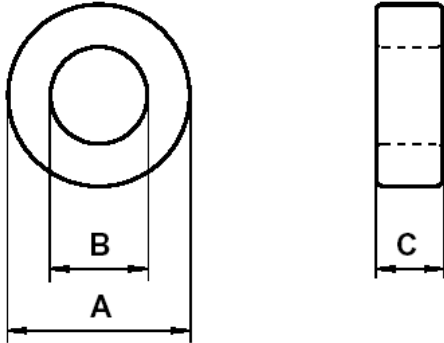

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	12.7	12.43	13.47
I.D. (B)	7.14	6.37	7.41
Ht. (C)	4.78	4.67	5.41

Eff. Parameters		
A_e mm ²	l_e mm	V_e mm ³
12.9	29.5	381

INDUCTANCE

AL value (nH/T ²)	Test conditions
8190 ± 30%	10 kHz, 0.5 mT (For N = 5, use 0.11mA), 25°C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1,500 V Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised