


DIMENSIONS

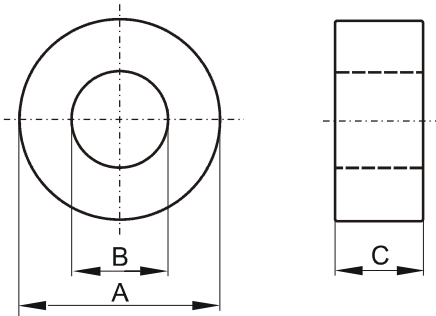

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	9.53	9.38	10.17
I.D. (B)	4.75	4.2	4.8
Ht. (C)	3.18	3.13	3.73
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
7.3	20.7	151	

INDUCTANCE

AL value (nH/T²)	Test conditions
1330 ± 25%	10 kHz, 0.5 mT (For N=3, use 0.54 mA), 25°C

CORE LOSSES

P_i max	Production lot limit Max avg	Test conditions
< 0.108 W (< 715 mW/cm ³)	< 0.098 W (< 650 mW/cm ³)	100 kHz, 200 mT, 25 °C
< 0.102 W (< 673 mW/cm ³)	< 0.093 W (< 612 mW/cm ³)	100 kHz, 200 mT, 100 °C

COATING

Epoxy rated for 200°C continuous operation
Voltage breakdown rating 1500V Min Wire-to-Wire

NOTE

Spec. modifications	Previous	Revised
2013-05-20		Issued