


DIMENSIONS

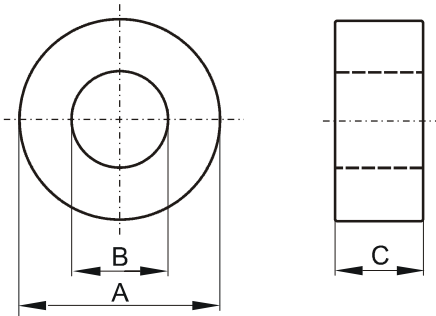

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	38.1	37.45	39.25
I.D. (B)	19.0	17.9	19.55
Ht. (C)	12.45	12.56	13.34
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
114.2	82.9	9462	

INDUCTANCE

AL value (nH/T²)	Test conditions
5190 ± 25%	10 kHz, 0.5 mT (For N=3, use 2.15 mA), 25°C

CORE LOSSES

P_i max	Production lot limit Max avg	Test conditions
< 6.76 W (< 715 mW/cm ³)	< 6.15 W (< 650 mW/cm ³)	100 kHz, 200 mT, 25 °C
< 6.37 W (< 673 mW/cm ³)	< 5.79 W (< 612 mW/cm ³)	100 kHz, 200 mT, 100 °C

COATING

Epoxy rated for 200°C continuous operation
Voltage breakdown rating 2000V Min Wire-to-Wire

NOTE

Spec. modifications	Previous	Revised
2013-05-20		Issued