




Specification for:
ZW41450TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

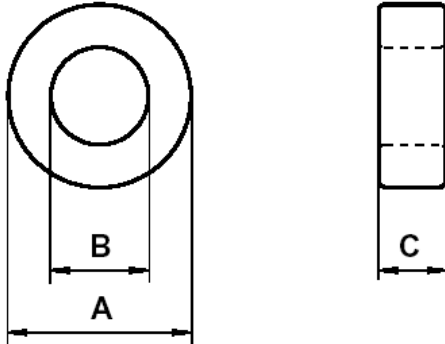

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	14.0	13.74	14.76
I.D. (B)	8.99	8.23	9.27
Ht. (C)	5.00	4.86	5.64

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
12.32	34.96	431

INDUCTANCE

AL value (nH/T ²)	Test conditions
4320 ± 30%	10 kHz, 0.5 mT (For N = 5, use 0.17 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i	Production lot limit Average	Test conditions	
≤ 3.5 · 10 ⁻⁶	≤ 3 · 10 ⁻⁶	10 kHz	0.5 mT, 25°C
≤ 55 · 10 ⁻⁶	≤ 45 · 10 ⁻⁶	100 kHz	

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1,500 V _{DC} Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2007.08.17	LF: General W material	LF: Detail as indicated