




Specification for:
ZW47326TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

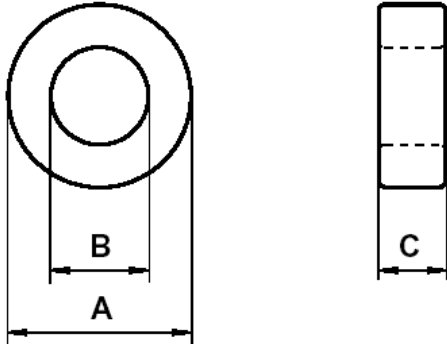

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	73.66	71.76	75.56
I.D. (B)	38.86	36.96	40.76
Ht. (C)	25.40	23.92	26.92

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
427	165	70595

INDUCTANCE

AL value (nH/T ²)	Test conditions
27610 ± 30%	10 kHz, 0.5 mT (For N = 5, use 0.91 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i	Production lot limit Average	Test conditions	
≤ 7.0·10 ⁻⁶	≤ 5.0 ·10 ⁻⁶	10 kHz	0.5 mT, 25°C
≤ 110·10 ⁻⁶	≤ 80·10 ⁻⁶	100 kHz	

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 2000 V _{DC} Min Wire-to-Wire.