




# 00X4022E060

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

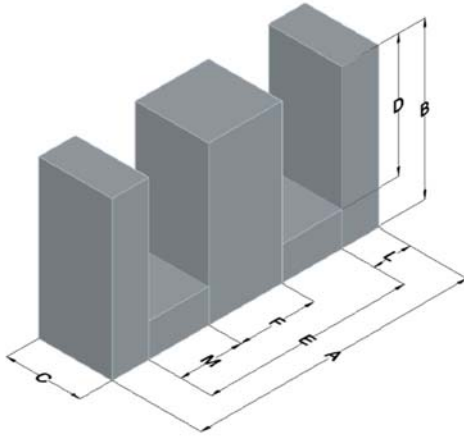

XFLux Permeability ( $\mu$ )	$A_L$ (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
60	194 ± 8%	XXXXXX	X4022E060

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
<b>A</b>	42.85	1.687	0.635	0.025		Box Qty= 168 pcs
<b>B</b>	21.1	0.830	0.330	0.013		
<b>C</b>	20.0	0.788	0.254	0.010		
<b>D</b>	14.9	0.587	-	-	Min	Available Hardware
<b>E</b>	30.35	1.195	-	-	Min	PCB4022N1
<b>F</b>	11.9	0.468	0.254	0.010		
<b>L</b>	5.94	0.234	-	-	Nom	
<b>M</b>	9.27	0.365	-	-	Min	

Physical Characteristics					
Break Strength min (kg)	Window Area $W_A$ (mm <sup>2</sup> )	Cross Section $A_e$ (mm <sup>2</sup> )	Path Length $L_e$ (mm)	Volume $V_e$ (mm <sup>3</sup> )	Weight ( Ea. Piece) (g)
23	276	237	98.4	23,300	75

Notes:	Temperature Rating
	Curie Temp: 700°C

