




# 00X6527E026

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

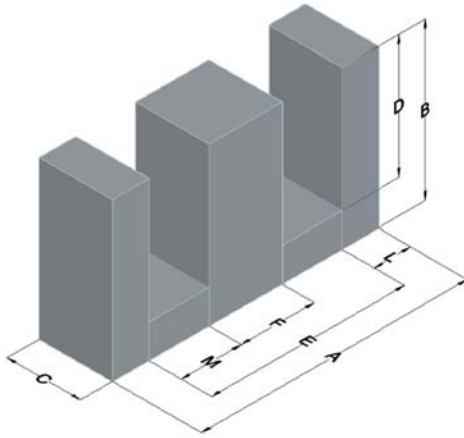

XFLux Permeability ( $\mu$ )	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
26	162 ± 8%	XXXXXX	X6527E026

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
<b>A</b>	65.15	2.565	1.27	0.050		Cardboard cut-outs Box Qty= 54 pcs
<b>B</b>	32.51	1.280	0.381	0.015		
<b>C</b>	27.0	1.063	0.406	0.016		
<b>D</b>	22.1	0.874	-	-	Min	<b>Available Hardware</b>
<b>E</b>	44.19	1.740	-	-	Min	<b>00B652701</b>
<b>F</b>	19.7	0.774	0.356	0.014		
<b>L</b>	10.0	0.394	-	-	Nom	
<b>M</b>	12.0	0.476	-	-	Min	

Physical Characteristics					
Break Strength min (kg)	Window Area W <sub>A</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (Ea. Piece) (g)
68	530	540	147	79,400	210

Notes:	<b>Temperature Rating</b>
	Curie Temp: 700°C

