




00L8020E026

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

PRELIMINARY

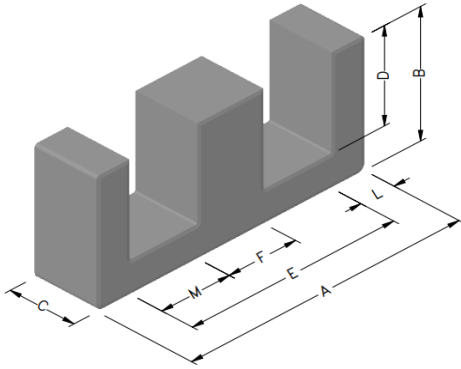

Kool M μ Ultra Permeability (μ)	AL (nH/T ²)	Core Marking	
		Lot Number	Part Number
26	103 \pm 8%	XXXXXX	L8020E026

	Dimensions		Tolerance (\pm)			Packaging
	(mm)	(in)	(mm)	(in)		
A	80.01	3.15	1.19	0.047		Est. Box Qty= 63 Pcs
B	38.10	1.50	0.64	0.025		
C	19.81	0.78	0.38	0.015		
D	28.02	1.10	-			Available Hardware
E	59.28	2.33	-			00B8020B1
F	19.81	0.78	0.38	0.015		
L	9.91	0.39	-			
M	19.81	0.780	-	-	Min	

Electrical Characteristics			Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Break Strength Min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Est. Weight (Ea. Piece) (g)
	80%	50%						
350	90	180	39	1,110	389	185	72,000	203.5

Notes:	Temperature Rating
	Curie Temp: 500

