




0058868A9

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

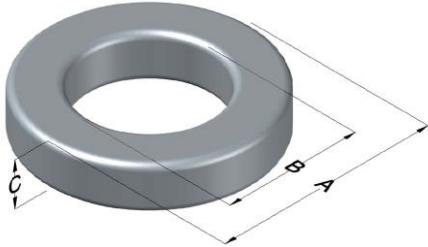

High Flux Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	30 ± 8%	XXXXXX	58868A9	N/A	Khaki

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	77.80	3.063	79.33	3.123	max	Cardboard cut-outs Box Qty= 45 pcs
ID (B)	49.20	1.938	47.82	1.883	min	
HT (C)	12.7	0.500	14.28	0.562	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
	1250	80%							
	200	375							

Winding Information					Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)		Curie Temp: 460°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor		Coating Temp (Continuous up to): 200°C
				OD	86.6	Notes:
				HT	29.1	
				Max OD	112	
				Max HT	54.3	
0%	58.4	40%	83.5	Surface Area (mm ²)		
20%	70.9	45%	86.7	Unwound Core		
25%	74.1	50%	90.4	40% Winding Factor		
30%	76.3	60%	98.1			
35%	80.4	70%	107			

