




00K6527E060

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

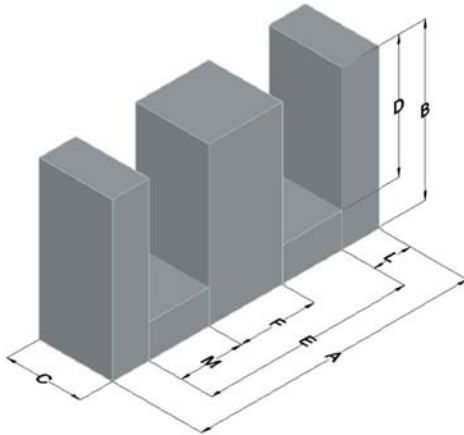

Kool M μ Permeability (μ)	A _L (nH/T ²)	Core Marking	
		Lot Number	Part number
60	300 ± 8%	XXXXXX	K6527E060

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	65.15	2.565	1.27	0.050		Cardboard cut-outs Box Qty= 54 pcs
B	32.51	1.280	0.381	0.015		
C	27.0	1.063	0.406	0.016		
D	22.1	0.874	-	-	Min	Available Hardware 00B652701
E	44.19	1.740	-	-	Min	
F	19.7	0.774	0.356	0.014		
L	10.0	0.394	-	-	Nom	
M	12.0	0.476	-	-	Min	

Electrical Characteristics		Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max(mW/cm ³)	DC Bias min (A·T/cm)	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (Ea. Piece) (g)
1200	80%	68	530	540	147	79,400	230
	23.8						

Notes:	Temperature Rating
	Curie Temp: 500°C

