




00K7228E060

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

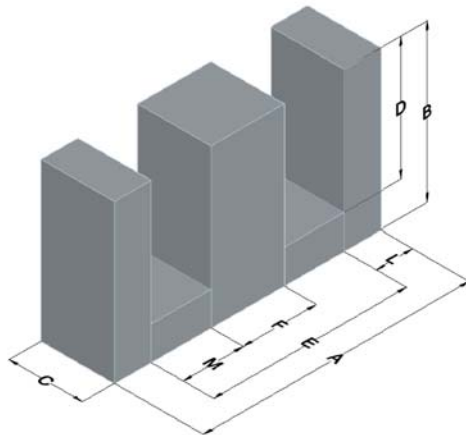

Kool M μ Permeability (μ)	A _L (nH/T ²)	Core Marking	
		Lot Number	Part number
60	235 ± 8%	XXXXXX	K7228E060

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	72.39	2.850	1.09	0.043		Cardboard cut-outs Box Qty= 60 pcs
B	27.94	1.100	0.508	0.020		
C	19.1	0.750	0.381	0.015		
D	17.7	0.699	-	-	Min	Available Hardware 00B722801
E	52.62	2.072	-	-	Min	
F	19.1	0.750	0.381	0.015		
L	9.53	0.375	-	-	Nom	
M	16.8	0.665	-	-	Min	

Electrical Characteristics		Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max(mW/cm ³)	DC Bias min (A·T/cm)	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (Ea. Piece) (g)
1200	80%	36	595	368	137	50,400	160
	23.8						

Notes:	Temperature Rating
	Curie Temp: 500°C

