




**00K8044E026**

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

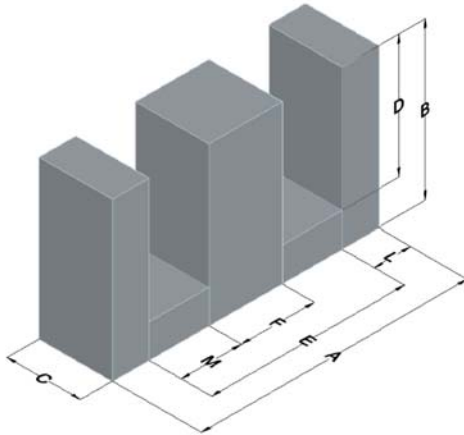

Kool M $\mu$ Permeability ( $\mu$ )	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
26	91 ± 8%	XXXXXX	K8044E026

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	80.01	3.150	1.19	0.047		Cardboard cut-outs Box Qty= 63 pcs
B	44.58	1.755	0.635	0.025		
C	19.8	0.780	0.381	0.015		
D	34.36	1.353	-	-	Min	Available Hardware
E	59.28	2.334	-	-	Min	
F	19.8	0.780	0.381	0.015		
L	9.91	0.390	-	-	Nom	
M	19.8	0.780	-	-	Min	

Electrical Characteristics		Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max(mW/cm <sup>3</sup> )	DC Bias min (A·T/cm)	Break Strength min (kg)	Window Area W <sub>A</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (Ea. Piece) (g)
1500	80%	84	1360	389	208	80,900	240
	63.6						

Notes:	Temperature Rating
	Curie Temp: 500°C

