




# 00X1808E060

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

XFLUX Permeability ( $\mu$ )	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
60	48 ± 8%	XXXXXX	X1808E060

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
<b>A</b>	19.3	0.760	0.305	0.012		Box Qty= 5,700 pcs
<b>B</b>	8.10	0.319	0.178	0.007		
<b>C</b>	4.78	0.188	0.152	0.006		
<b>D</b>	5.53	0.218	-	-	Min	<b>Available Hardware</b>
<b>E</b>	13.9	0.548	-	-	Min	<b>PCB1808B1</b>
<b>F</b>	4.78	0.188	0.127	0.005		<b>00B180801</b>
<b>L</b>	2.39	0.094	-	-	Nom	
<b>M</b>	4.64	0.183	-	-	Min	

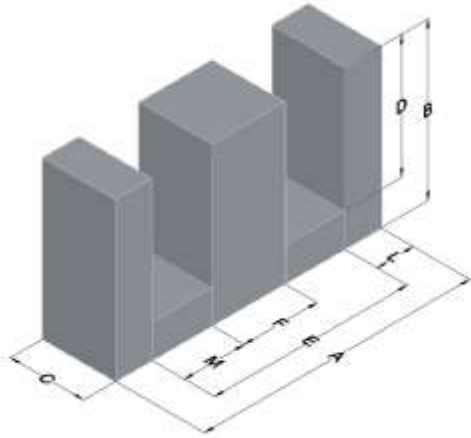

Physical Characteristics					
Break Strength min (kg)	Window Area W <sub>A</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (Ea. Piece) (g)
5	121	22.8	40.1	914	3.10

Notes:	Temperature Rating
	Curie Temp: 700°C

