




# 00X4022E040

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

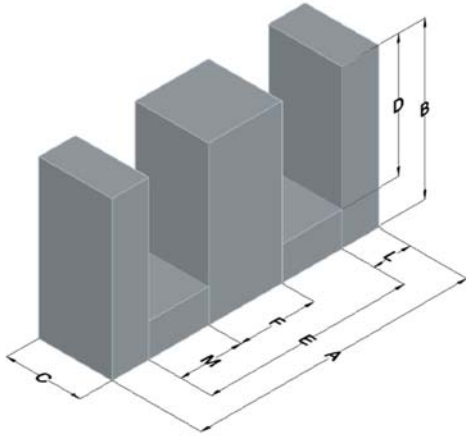

XFLux Permeability ( $\mu$ )	$A_L$ (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
40	140 $\pm$ 8%	XXXXXX	X4022E040

	Dimensions		Tolerance ( $\pm$ )			Packaging
	(mm)	(in)	(mm)	(in)		
A	42.85	1.687	0.635	0.025		Box Qty= 168 pcs
B	21.1	0.830	0.330	0.013		
C	20.0	0.788	0.254	0.010		
D	14.9	0.587	-	-	Min	Available Hardware
E	30.35	1.195	-	-	Min	PCB4022N1
F	11.9	0.468	0.254	0.010		
L	5.94	0.234	-	-	Nom	
M	9.27	0.365	-	-	Min	

Physical Characteristics					
Break Strength min (kg)	Window Area $W_A$ (mm <sup>2</sup> )	Cross Section $A_e$ (mm <sup>2</sup> )	Path Length $L_e$ (mm)	Volume $V_e$ (mm <sup>3</sup> )	Weight (g)
23	276	237	98.4	23,300	65

Notes:	Temperature Rating
	Curie Temp: 700°C

