




Specification for:
ZW41206TC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

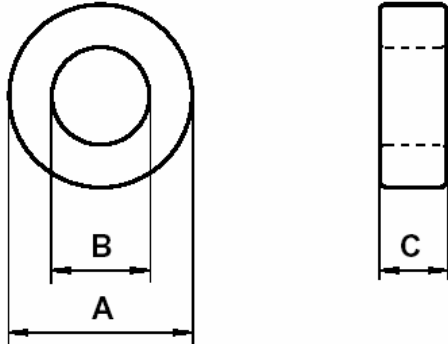

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	12.7	12.43	13.47
I.D. (B)	5.16	4.39	5.43
Ht. (C)	6.35	6.19	7.01

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
22	25	550

INDUCTANCE

A _L value (nH/T ²)	Test conditions	
11280 ± 30%	10 kHz	0.5 mT (For N = 5, use 0.117 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i	Production lot limit Average	Test conditions	
≤ 3.5 · 10 ⁻⁶	≤ 3 · 10 ⁻⁶	10 kHz	0.5 mT, 25°C
≤ 55 · 10 ⁻⁶	≤ 45 · 10 ⁻⁶	100 kHz	

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1500 V Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2006.01.12	Breakdown voltage > 1,000 V LF: General W Material	Breakdown voltage > 1,500 V LF: Detail as indicated